



Energy efficiency assessment and optimization of solar organic Rankine cycle for combined heat and power generation for a residential building: Case study of Baghdad city, Iraq

Mohammed Ali Sami Mahmood^{ab*}, Sergei Kuzmin^a

^aDepartment of Energy Supply for Enterprise and Thermal Engineering, Tambov State Technical University, Tambov, Russia.

^bDepartment of Machines and Equipment Engineering Techniques, Al-Mussaib Technical College, Al-Furat Al-Awsat Technical University, Babil, Iraq.

PAPER INFO

Paper history:

Received ?? ????? 2020

Accepted in revised form ?? ????? 2020

Keywords:

Energy efficiency assessment

solar organic Rankine cycle

CHP

Baghdad

Republic of Iraq

ABSTRACT

Solar Organic Rankine Cycle (SORC) is a successful approach to sustainable development and exploiting clean energy sources. The research aims to improve and evaluate the energy efficiency of the SORC for combined heat and power generation for a residential home under the climatic conditions of Baghdad, Iraq. Thermo-economic analysis was carried out for the proposed energy supply system. Refrigerant HFC-245fa was used as a working fluid in a solar organic Rankine cycle, and oil poly alkyl benzene (TLV-330) was suggested as a heat transfer fluid in the solar collector field. Parametric studies for some key parameters were conducted to examine the impact of various operating conditions on energy efficiency. The results showed a significant improvement in energy efficiency. The maximum efficiency of SORC CHPG reached 79.14% when solar heat source temperatures were in the range of 100 to 150°C and the solar radiation was at a maximum value of 870 W/m² at noon on the 15th day of July in Baghdad. The maximum energy produced by SORC CHPG was 472.5 kW when the optimal average value of global solar radiation was 7.5 kWh/m²/day in June. The economic investigations revealed that the payback period of the new energy supply system was 10 years with the positive net present cost when the solar power plant was working 18 h/day.

1. INTRODUCTION

Currently, fossil fuels are used to meet 70% of the world's energy demands, 40% of which are spent in building sectors for various purposes, including air conditioning, ventilation, cooling, and heating [1]. Today, oil and gas are the main and dominant sources of energy supply in Iraq. The combustion products of conventional fuels lead to serious environmental problems [2-4]. The emergence of recent technology and an increase in population have led to an increase in energy consumption worldwide and in the Republic of Iraq particularly. The use of non-conventional solar energy sources for energy supply addresses these issues [5,6]. Renewable solar energy is characterized by stability and purity. Iraq is a country located near the Sun Belt and characterized by high solar radiation intensity and brightness throughout the year. Therefore, solar energy can be used as an alternative source of energy to meet energy needs and address the acute shortage of energy supply in Iraq [7-10]. An organic Rankine cycle (ORC) has become a reliable technology to convert heat into electricity using various heat sources such as biomass, geothermal, heat recovery, solar, and heat from industrial processes [11,12]. The heat sources divide into high, medium, and low depending on the temperature range between 50°C and 350°C. Moreover, the advantages of ORC technology include extremely high turbine efficiency (up to 90%), high system efficiency, low peripheral speed, low turbine mechanical stress, low turbine rotation speed, dry expansion process, low environmental impact, and

simplicity of expander design, thus making it desirable [12,13]. Organic fluids with a lower boiling point and higher vapor pressure are utilized as heat carriers in the ORC cycle. Over the past years, the small-scale Solar Organic Rankine Cycle (SORC) has become a mature technology and a topic of extensive research by researchers [14]. Organic working fluids are selected according to the specified criteria involving environmentally-friendly, non-flammable, and appropriate physical properties that meet the system requirements for optimum efficiency. The working fluids can be hydrofluorocarbons, hydrocarbons, siloxanes, and mixtures of these components [15]. In this regard, many studies have been conducted to examine the performance of ORC using various organic fluids, taking into account solar energy as a heat source under different conditions [16,17]. In recent years, many studies have investigated the SORC for poly-generating applications. Yang et al. [18] constructed a new SORC for generating 1 MW. Different working fluids were used in the performance evaluation for the new mode. Outcomes revealed that the efficiency was elevated by 4.2% higher than an unstable operating. Freeman et al. [19] tested an SORC for Combined Heat and Power Generation (CHPG) integrated with a thermal energy storage unit with phase change materials. They investigated the efficiency of the system under UK and Cyprus conditions. The results pointed out that hydrated-salt PCMs provided high performance and power output. Bouvier et al. [20] performed experimental investigation for micro SORC CHPG. The obtained energies were 1.3 kW of electricity and

*Corresponding Author's Email: mohammed.sami@atu.edu.iq

(Mohammed Ali Sami)

19 kW of heat energy. The efficiency of converting solar energy into electricity and heat energy reached 3% and 38%, respectively. Garcia-Saez et al. [21] conducted thermal and economic research on the implementation of SORC CHPG in residential sectors for various scenarios. They used on-grid and off-grid operating modes. The results showed the feasibility of applying the system in locations characterized by specific climatic conditions. The main indicators of an economic analysis estimated 13% IRR, 3.1 years PP, and positive NPV. Habka and Ajib [22] considered the utilization of zeotropic mixtures in SORC for CHPG. Numerical simulations were carried out for predicting energy efficiency and feasibility. The outcomes confirmed that the use of R409A in ORC was ideal and the cost of energy production was reduced by 16.20%. Yunus Emre [23] applied SORC for power, cooling, and hydrogen generation. Hydrogen is produced using produced electricity. The findings showed that the energy efficiency of the system increased from 58% to 64% when solar radiation increased from 400W/m² to 1000W/m², and the rate of hydrogen generation rose from 0.1016 kg/h to 0.1028 kg/h. Harwinder Singh and R.S. Mishra [24] carried out exergy and energy analysis of both supercritical CO₂ (SCO₂) cycle and organic Rankine cycle (ORC) driven by solar energy to produce power. It was found that the exergetic and thermal efficiency of all the combined cycles increased when the direct normal irradiance rose from 0.5 kW/m² to 0.95 kW/m². The maximum thermal and exergetic efficiency was around 78.07% and 43.49%, respectively. Despite the reported attractive results of the SORC technology, it has not been simulated in the climatic conditions of Baghdad, Iraq. In this study, by contributing to the enhancement of the energy efficiency of the current system, this paper analyzes a new model of SORC CHPG to meet the needs of electric power, Domestic Hot Water (DHW), and heating for a typical residential building in the conditions of Baghdad city. The suggested technique is not dependent on the grid or fossil fuels. It appears that the suggested solution is extremely realistic due to the presence of both low- and high-temperature water for usage at home. A calculation method for the main performance indicators associated with the proposed solar energy system is developed, taking into account the peculiarities of the new design and the potential of solar radiation in Baghdad.

2. MATERIAL AND METHODS

The research methodology relies on theoretical and experimental studies of previous research on the topic of SORC CHPG. To calculate the main parameters and energy efficiency of the proposed system, the basic concepts of thermodynamics were applied [25,26]. Commercial software "Engineering Equation Solution (EES)" was used for simulating and obtaining the results of the study [27]. The indispensable operating parameters were added to the EES to obtain the full outcomes of the proposed solar system. An optimized model of SORC CHPG was employed to obtain initial results from the available parameters. Modeling of the obtained results was conducted by considering various operating parameters to help determine the optimal operating conditions of the system to provide maximum performance. The findings were compared with reported investigations for the model verification and validation of results, taking into account the small deviations and loads of case studies. Iraq is characterized by the abundance of incoming solar radiation during the year thanks to its location. Solar radiation of 1000 W/m² for one hour is equal to

one kWh/m² [28]. The maximum measured value of solar radiation at noon is about 950 W/m² [29]. The received average daily solar radiation ranges between 4.4-5.45 kWh/m²/day, as shown in Fig. 1. The incident average value of solar radiation in Baghdad is about 5 kWh/m²/day [8].

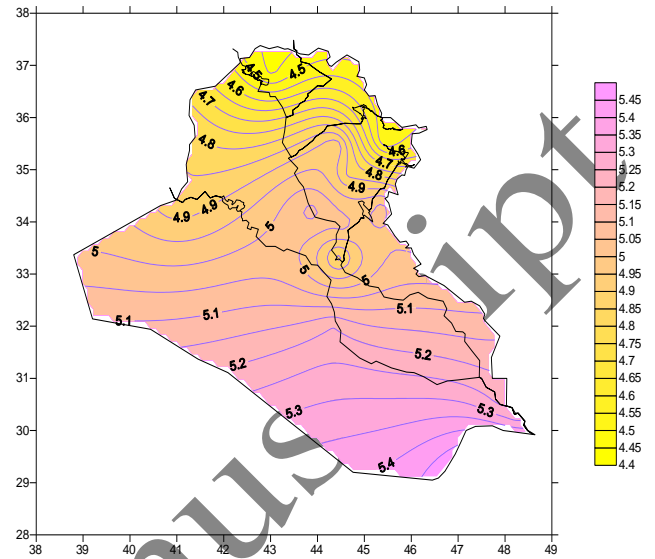


Figure 1. Average daily solar radiation for different locations in Iraq [8].

The recorded average values of global solar radiation (AGSR) and high/low ambient temperature for Baghdad city are tabulated in Table 1.

Table 1. AGSR data and ambient temperatures by month for Baghdad [30].

Month	GSR MJ/m ² /day	GSR kWh/m ² /day	Average High temperature °C	Average Low temperature °C
January	10.6	2.9	16	4
February	13.33	3.7	19	6
March	17.7	4.9	24	10
April	21.6	6	30	15
May	23.4	6.5	37	20
June	27.0	7.5	42	24
July	26.0	7.2	44	26
August	24.6	6.8	44	25
September	20.8	5.7	40	22
October	15.8	4.3	33	16
November	11.9	3.3	24	9
December	9.8	2.7	17	5
Total average yearly	18.6	5.2	30.8	15

Baghdad city is the capital of Iraq and located in the central region (latitude 33° 33', longitude 44° 39'), which was selected as the location of a residential home. The thermal loads for heating, DHW, and electrical loads of the residential home were calculated, as shown in Table 2.

Table 2. Calculated loads of the case study [31].

Type of load	Value (kW)
Electrical loads (P_{ele})	15
Thermal load for heating (Q_h)	29
Domestic hot water demand (Q_{DHW})	19

In this work, in response to the climatic conditions of Baghdad and the requirements of the energy system, it is proposed that oil poly alkyl benzene (TLV-330) be used as a new Heat Transfer Fluid (HTF). The characteristics and thermophysical properties of HTF are presented in Table 3.

Table 3. Characteristics of TLV-330 [32].

Name of an indicator	Norm
Appearance	Light yellow oily, homogeneous liquid
Minimum operating temperature	40°C
Maximum operating temperature of the liquid phase	330°C
Maximum operating temperature of the vapor phase	330°C
Density 20°C	850 - 870 kg/m ³
Average specific heat	2.2 kJ/kg.°C
Freezing temperature	- 30°C
Boiling temperature	330°C
Manufacturer country	Russia

2.1. System description

The basic SORC standalone (SORC SA) for the generation of electricity is illustrated in Fig. 2a. The proposed new SORC system for providing electricity, DHW, and hot water for a heating purpose depending on solar energy as a heat source is shown in Fig. 2b. The novel design of SORC CHPG works as follows. The liquid working fluid (R-245fa) flows by the pump (1) to the ORC evaporator (2). It absorbs the heat in the evaporator and then, converts it into steam. The vapor working fluid enters the expander (3) under given thermodynamic conditions to drive it and generate electricity via an electric generator (4). Then, vapor enters the condenser (5) to be condensed. The hot water at the outlet of the condenser at an accepted temperature is used as DHW. The liquid working fluid enters the pump and the cycle repeats. The thermal energy storage unit (9) is integrated to ensure that the system operates stably throughout the day, avoids the influence of climate changes, and fills the collector with non-freezing liquid. The HTF enters the SORC evaporator (2) and the outlet HTF flows via the heat exchanger (9) where hot water is released for heating purposes in the winter season. In the end, the working fluid returns to the heat storage unit (9) and is reheated thanks to the solar energy, and the next cycle begins. A three-way valve is utilized to control the flow direction of the liquid and shut off the heating system in the summer season. These two proposed variants of heating consider a successful solution under Baghdad conditions. In this system, there is no demand for fuel to heat the water.

2.2. Thermodynamic analysis and mathematical modeling

The analysis and calculations were built on the following assumptions:

1. The efficiency rates of the ORC generator, expander, and pump are constant and non-dependent in the operating mode.
2. Hydraulic resistance of heat exchangers and pipelines is not considered.

3. No heat is exchanged with the environment.
4. Changes in kinetic and potential energy are not considered.
5. Refrigerant HFC-245fa is used as working fluid in the SORC cycle due to its thermophysical characteristics and for economic grounds.

Table 4 presents the required operating parameters for modeling the proposed SORC CHPG under Baghdad conditions.

Table 4. Design parameters of the proposed SORC CHPG [33].

Parameter	Value
Power output (P_{ele})	15 kW
Cooling water temperature at the inlet of the condenser (T_9)	15°C
Hot water temperature at the outlet of the condenser (T_{10})	40°C
SORC condensation temperature (T_8)	50°C
Maximum operating temperature of ORC (T_6)	140°C
Maximum working pressure of ORC (P_{evap})	2828.7 kPa
Ambient temperature (T_{am})	25°C
The temperature at the evaporator inlet (T_1)	150°C
The temperature at the evaporator outlet (T_2)	110°C
The temperature at the heat exchanger (9) inlet (T_2)	110 °C
The temperature at the heat exchanger (9) outlet (T_3)	80°C
Water temperature at the inlet of the heat exchanger (T_5)	60°C
water temperature at the outlet of the heat exchanger (T_4)	75°C
The temperature of HTF at the inlet of the heat storage tank (T_{12})	150°C
The temperature of HTF at the outlet of the heat storage tank (T_{11})	130°C
Isentropic efficiency of the ORC expander (η_e)	80%
Efficiency of the ORC pump (η_p)	80%
Efficiency of the ORC generator (η_g)	96%
Solar collector efficiency (η_{sc})	70%
Solar radiation (G)	1000 kWh/m ²

The equations of mass and energy balance for control volume in SORC CHPG are as follows [26]:

$$\left. \begin{aligned} \sum m_{in} - \sum m_{out} &= 0 \\ \sum Q_{in} - \sum Q_{out} &= 0 \\ Q_{in} - W_{in} + \sum_{in} m.h - \sum_{out} m.h &= 0 \end{aligned} \right\} \quad (1)$$

2.2.1. Modeling of Solar field

The energy collected by the solar collector and transmitted to the HTF is determined via the application of the thermo-balance as follows [34]:

$$Q_{sc} = G(\tau) \cdot A_{sc} \cdot \eta_{sc}(\tau) = m_{HTF} \cdot C_{HTF} \cdot (T_{out} - T_{in})_{HTF} \quad (2)$$

The following empirical equation can be utilized to estimate the mass flow rate of oil [34,35]:

$$m_{HTF} = 0.02 \cdot A_{sc} \quad (3)$$

The solar collector area is used to calculate the volume of the thermal storage tank [34]:

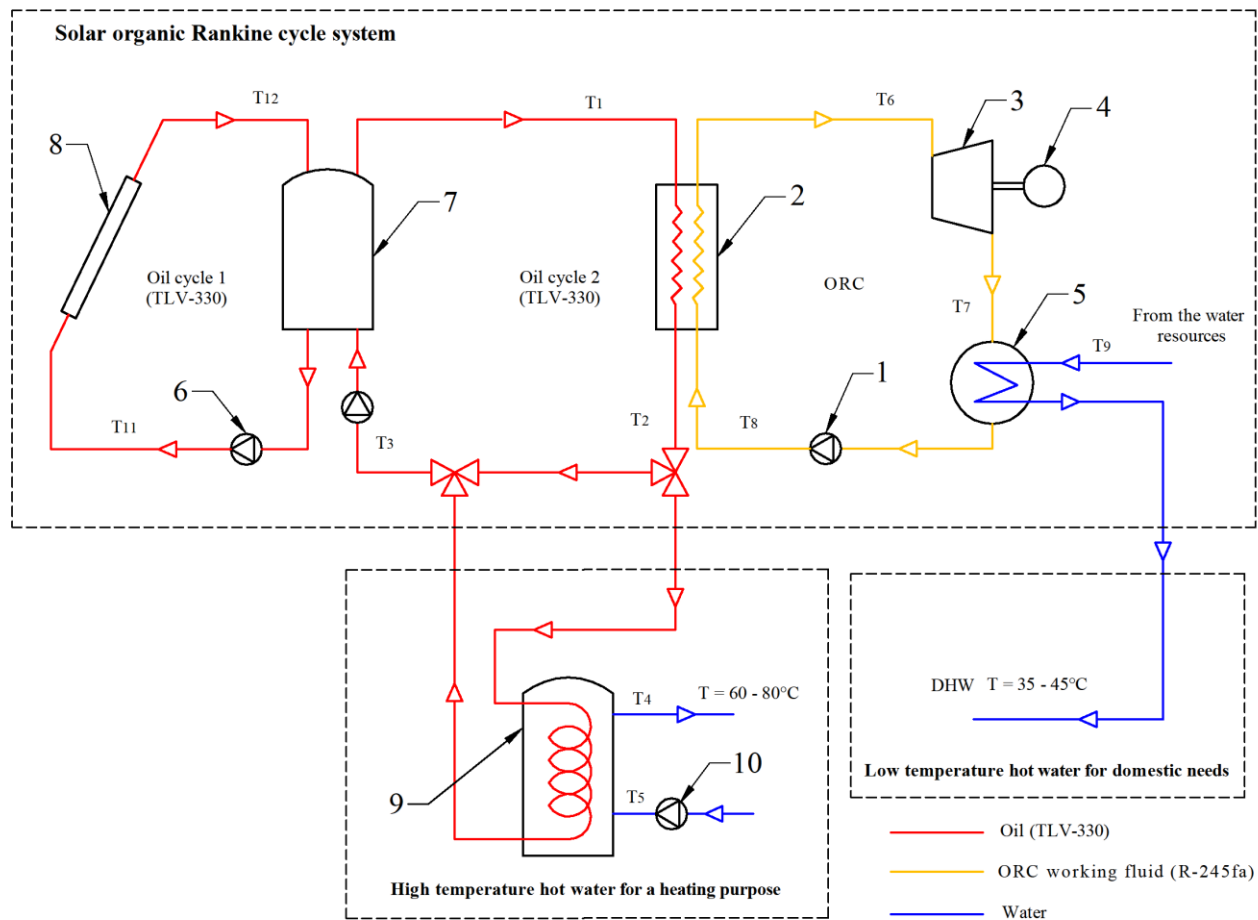
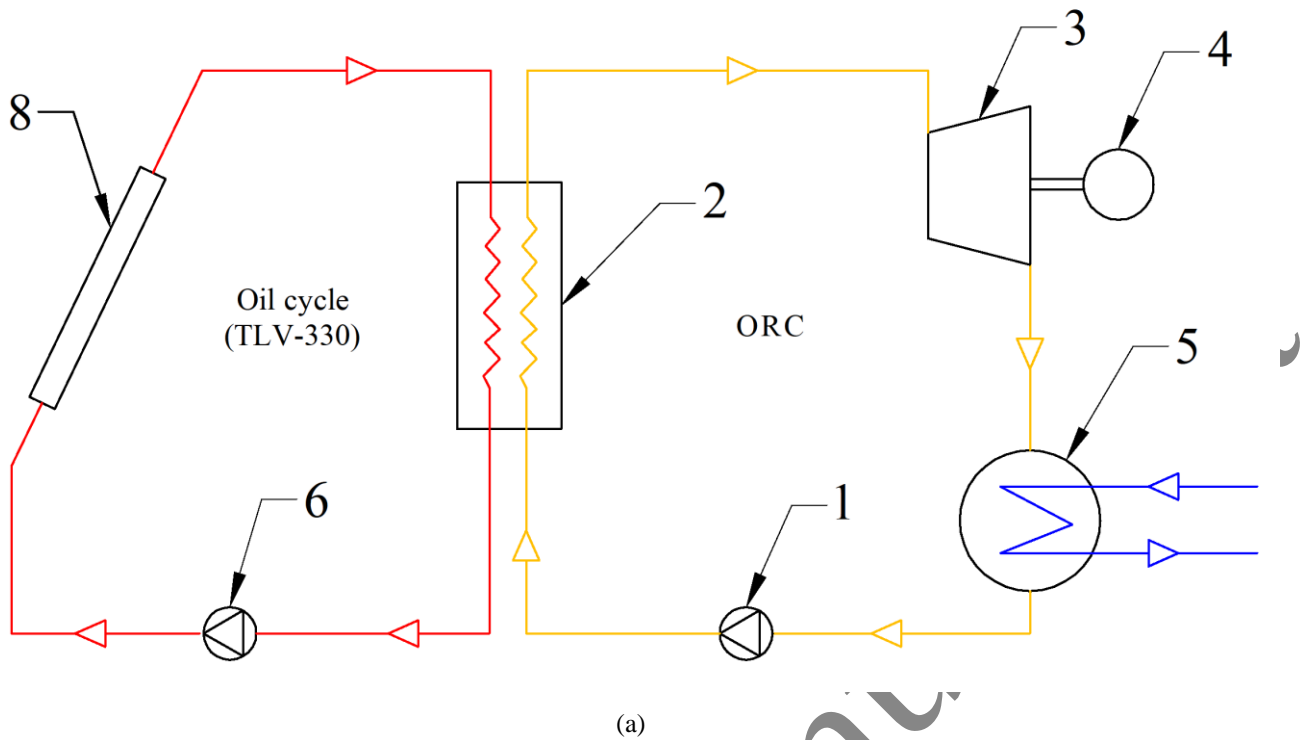


Figure 2. Schematic diagram of (a) basic SORC SA for generation of electricity and (b) proposed developed design of SORC CHPG: 1. organic fluid circulation pump, 2. evaporator, 3. expander/ turbine, 4. electric generator, 5. condenser, 6. oil circulation pumps, 7. heat storage tank, 8. solar thermal collector, 9. heat exchanger for heating purposes, 10. hot water circulating pump.

$$V_{HST} = \frac{A_{sc}}{80} \quad (4)$$

The system is examined in the stable mode; therefore, the results are not significantly affected by the volume and shape assumptions made for the storage tank [33]. The required area of the collector for a solar plant is calculated as follows:

$$A_{sc} = \frac{Q_h + Q_{DHW} + P_{ele}}{G(\tau) \cdot \eta_{sc}(\tau)} \quad (5)$$

The collector efficiency is expressed in the following formula [14]:

$$\eta_{sc} = \eta_o + a_1 \cdot \frac{(T_{av} + T_{am}(\tau))}{G(\tau)} - a_2 \cdot \frac{(T_{av} + T_{am}(\tau))^2}{G(\tau)} \quad (6)$$

where η_o represents optical efficiency. a_1 W/(m².°C) and a_2 W/(m².°C) are coefficients of heat loss. The values of these parameters were taken 0.825, 0.91, 0.0006, respectively [36]. The average collector temperature is calculated as:

$$T_{av} = \frac{T_{sc,in} + T_{sc,out}}{2} \quad (7)$$

2.2.2. Devices modeling of ORC unit

The power required to operate the ORC pump is calculated as [37]:

$$W_p = \frac{m_{wf} \cdot v_1 \cdot (P_{evap} - P_{cond})}{\eta_p} = m_{wf} \cdot (h_2 - h_1) \quad (8)$$

The mass flow rate m_{wf} kg/s flowing in the ORC cycle is calculated using the following formula:

$$m_{wf} = \frac{P_{ele}}{(h_3 - h_4) \cdot \eta_g} \quad (9)$$

The rate of heat transmitted in the ORC evaporator is determined as [36]:

$$Q_{evap} = m_{wf} \cdot (h_3 - h_2) = m_{HTF} \cdot C_{HTF} \cdot (T_{in} - T_{out})_{HTF} \quad (10)$$

An ORC turbine power output is determined as [36]:

$$P_{ele} = m_{wf} \cdot (h_3 - h_4) \cdot \eta_e \cdot \eta_g = m_{wf} \cdot (h_3 - h_4) \cdot \eta_g \quad (11)$$

The heat removal in the condenser can be expressed as [36]:

$$Q_{cond} = m_{wf} \cdot (h_4 - h_1) = m_w \cdot C_w \cdot (T_{out} - T_{in})_w \quad (12)$$

The volumetric flow rate is calculated using the following formula:

$$V = m_{wf} \cdot v_{wf} \quad (13)$$

The application of a heat balance determines the mass flow rate of cooling water in a condenser as follows:

$$m_w = \frac{m_{wf} \cdot (h_4 - h_1)}{C_w \cdot (T_{out} - T_{in})} \quad (14)$$

The work performed by the SORC cycle is calculated as follows [34]:

$$P_{net} = P_{ele} - W_p \quad (15)$$

The thermal efficiency of the ORC is expressed as follows:

$$\eta_{ORC} = \frac{P_{net}}{Q_{evap}} \cdot 100 \quad (16)$$

2.2.3. Energy efficiency

The energy efficiency of the proposed SORC in various energy generation scenarios is defined as follows [34]:

- For electrical generation standalone:

$$\eta_{SORCSA} = \frac{P_{net}}{G(\tau) \cdot A_{sc}(\tau)} \cdot 100 \quad (17)$$

- For multi-generation of energy:

$$\eta_{SORCCHPG} = \frac{P_{net} + Q_{DHW} + Q_h}{G(\tau) \cdot A_{sc}(\tau)} \cdot 100 \quad (18)$$

2.2.4. Heat exchanger modeling

The size of heat exchangers plays a vital role in the system cost of SORC CHPG. To predict the area of heat exchangers of the SORC CHPG, an average logarithmic temperature difference (LMTD) method was used. It is expressed in the following formula [38]:

$$Q_i = U_i \cdot A_i \cdot LMTD_i \quad (19)$$

where U is the overall heat transfer coefficient (OHTC), W/(m².°C). A is the heat exchanger area m². $LMTD_i$ is the average logarithmic temperature difference °C. For counter flow, the LMTD is determined as follows [25]:

$$LMTD_i = \frac{T_{h,in} - T_{c,out} - T_{h,out} - T_{c,in}}{\ln \left(\frac{T_{h,in} - T_{c,out}}{T_{h,out} - T_{c,in}} \right)} \quad (20)$$

$$\Delta T_1 = T_{h,in} - T_{c,out}$$

$$\Delta T_2 = T_{h,out} - T_{c,in}$$

where ΔT_1 and ΔT_2 represent the temperature difference between two fluids at the two ends (inlet and outlet) of the heat exchanger. The values of OHTC for the evaporator, condenser, and heat exchanger for heating were taken as average depending on representative values in [25]. They are tabulated in Table 5.

Table 5. Average representative values of OHTC.

Heat exchanger type for SORC CHPG	U , W/(m ² .°C)
Evaporator	300
Condenser	650
Heat exchanger for heating	225

3. RESULTS AND DISCUSSION

The main findings of the study regarding the desired working conditions are presented in Table 6.

Table 6. Results of the study.

Parameter	Value
Heat rate in the evaporator (Q_{evap})	93.45 kW
Heat rejection in the condenser (Q_{cond})	78.62 kW
Work turbine (P_{ele})	15 kW
Work pump (W_p)	1.035 kW
Mass flow rate of the working fluid (m_{wf})	0.4223 kg/s
Mass flow rate of cooling water (m_w)	0.6241 kg/s
Mass flow rate of HTF (m_{HTF})	1.8 kg/s
Volumetric flow rate of the working fluid at the input of the expander (V_3)	0.002031 m ³ /s
Volumetric flow rate of the working fluid at the outlet expander (V_4)	0.0003332 m ³ /s
Net power output (P_{net})	13.97 kW
Thermal efficiency of the ORC (η_{ORC})	14.94%
Energy efficiency of the SORC SA ($\eta_{SORC SA}$)	17.84%
Total Energy efficiency of the SORC CHPG ($\eta_{SORC CHPG}$)	79.14%
Area of ORC evaporator (A_{evap})	11.6 m ²
Condenser area (A_{cond})	2.6 m ²
Heat exchanger area for heating (A_{HEH})	4.81 m ²
Solar collector area of the SORC SA (A_{sc})	21.4 m ²
Solar collector area of the SORC CHPG (A_{sc})	90 m ²
Heat storage tanks volume (V_{HST})	1.125 m ³

3.1. Influence of vapor temperature

The temperature of the heat source plays an important role in the performance of the solar plant. The high temperature of HTF in the solar collector under conditions of Baghdad city leads to a higher vapor temperature at the turbine inlet of the SORC and, consequently, high energy efficiency. The efficiency is enhanced as the working fluid temperature increases at the turbine inlet. The thermal efficiency of SORC SA varies from 7.25% to 14.94% depending on the temperature, as shown in Fig. 3.

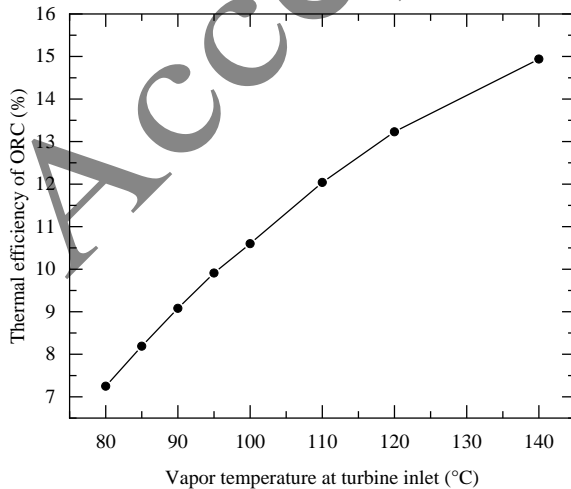


Figure 3. Influence of vapor temperature at the turbine inlet on the thermal efficiency of the ORC.

The volumetric flow rate of R-245fa at the turbine outlet is crucial and affects the system cost and size. It decreases as the temperature increases, as shown in Fig. 4.

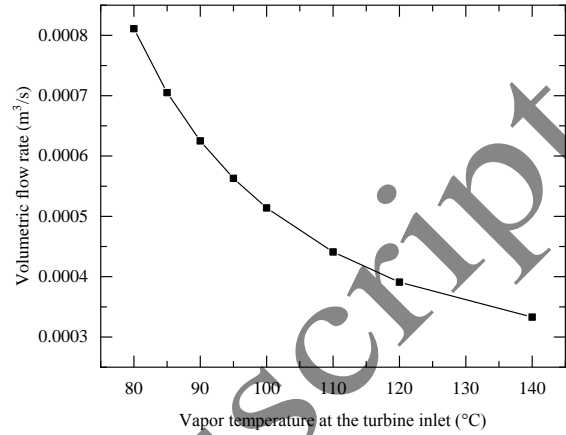


Figure 4. Influence of vapor temperature at the turbine inlet on the volumetric flow rate.

Fig. 5 shows the change in the mass flow rate of the working fluid depending on the temperature at the turbine inlet. The mentioned rate decreases following a rise in the temperature at the turbine inlet due to an increase in enthalpy difference. The temperature of the condensation affects the efficiency adversely, as presented in Fig. 6.

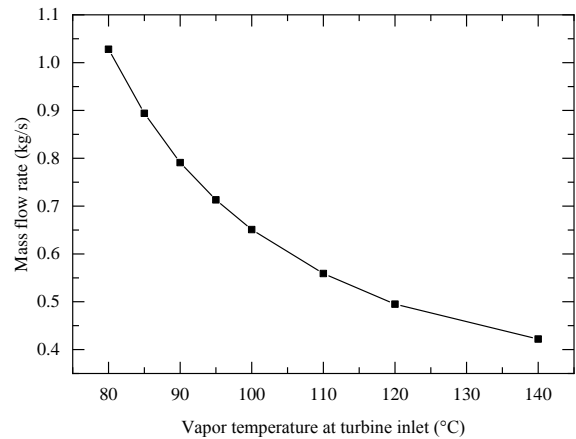


Figure 5. Influence of vapor temperature at the turbine inlet on the mass flow rate.

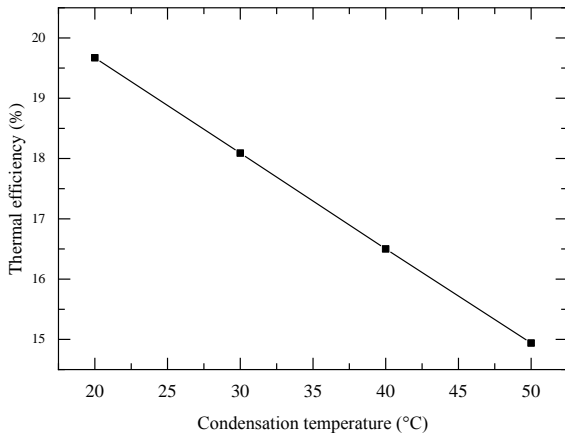


Figure 6. Influence of condenser temperature on the thermal efficiency of the ORC.

3.2. Effect of pressures

To ensure the optimum system performance, the working pressure range of the working fluid must be determined along with its thermophysical properties when exposed to a certain temperature. High working pressure requires reliability and strength for the evaporator. The performance of SORC SA increases with an elevation of evaporation pressure, as illustrated in Fig. 7.

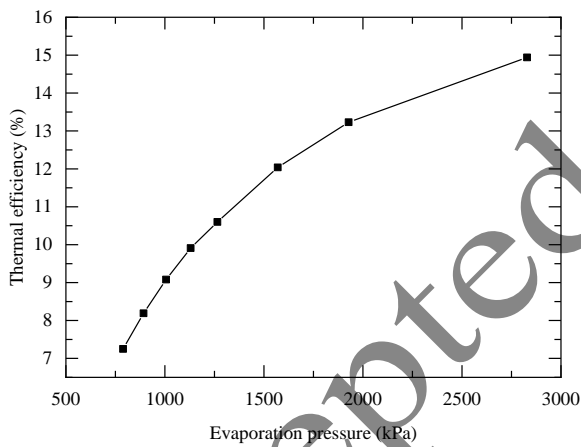


Figure 7. Influence of evaporation pressure on the performance of the ORC.

3.3. Effect of solar radiation on Baghdad city

The area of the solar collector strongly depends on the intensity of solar radiation in the place of construction of the solar power plant. The high incident solar radiation, long periods of brightness, and high temperature in Baghdad reduce the solar collector area and subsequently, the cost of the system minimizes. The maximum and minimum values of the collector area for SORC SA and SORC CHPG range from 7.937 to 2.857 m² and 33.33 to 12 m², respectively, as shown in Fig. 8.

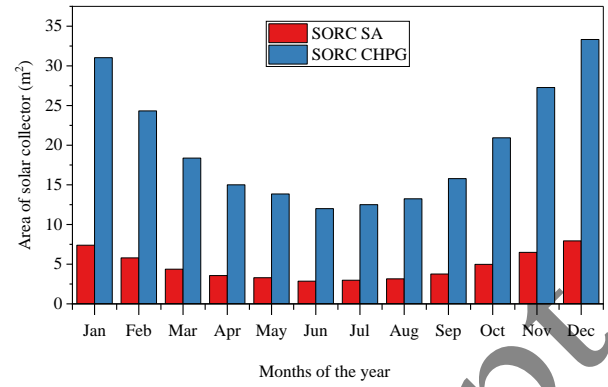


Figure 8. Variation of solar collector area with AGSR.

The collector efficiency of the proposed SORC CHPG changes with the intensity of the Hourly Solar Radiation (HSR) and ambient temperature. The highest collector efficiency was 74.38% when the recorded maximum value of HSR was 870 W/m² on the 15th day of July for Baghdad, as illustrated in Fig. 9.

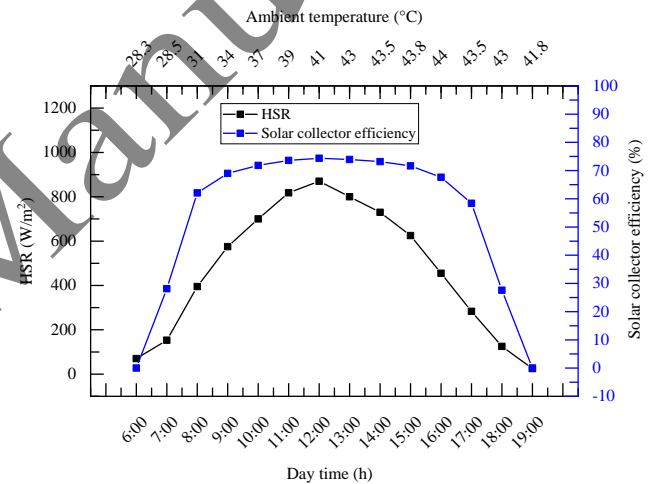


Figure 9. Variation of solar collector efficiency with the HSR and ambient temperature.

Fig. 10 shows the variation of the energy produced by both SORC SA and the novel SORC CHPG with HSR on the 15th day of July for Baghdad city. The maximum electric energy generated by SORC SA and the total energy (electric and heat demand) obtained by SORC CHPG reached 13.77 kW and 54.81 kW, respectively, when the HSR value was at its highest value of 870 W/m², as illustrated in Fig. 10.

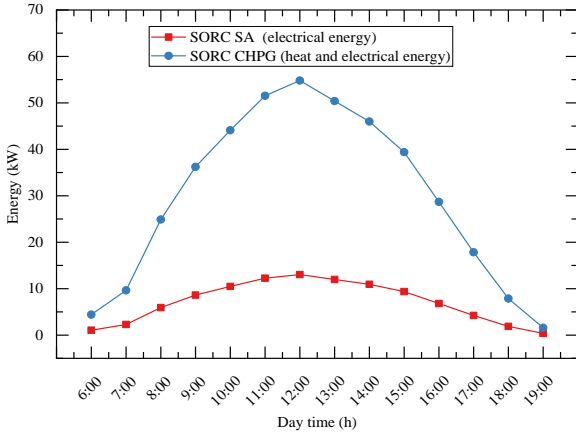


Figure 10. Daily energy generation by the hour.

The maximum energy generated by both SORC SA and SORC CHPG was 118.1 and 472.5 kW, respectively, when the recorded AGSR of Baghdad was 7.5 kWh/m²/day in June, as presented in Fig. 11.

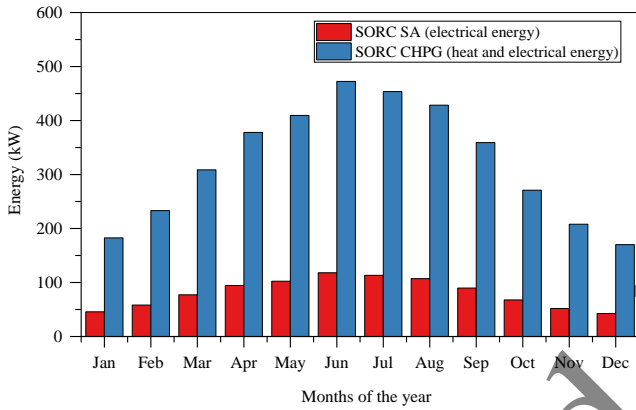


Figure 11. Variation of energy generated in different months of the year.

3.4. Energetic efficiency enhancement

In the proposed developed design of SORC CHPG, many scenarios of energy generation can be achieved. The energy efficiency and its improvement for multi-generation are shown in Fig. 12. The optimal efficiency and enhancement reached 79.1% and 68.1%, respectively, when the HSR was at the highest value of 870 W/m² in July. In the new model, the rate of heat transferred for DHW and heating purposes was taken into account; as a result, the total energy efficiency increased significantly.

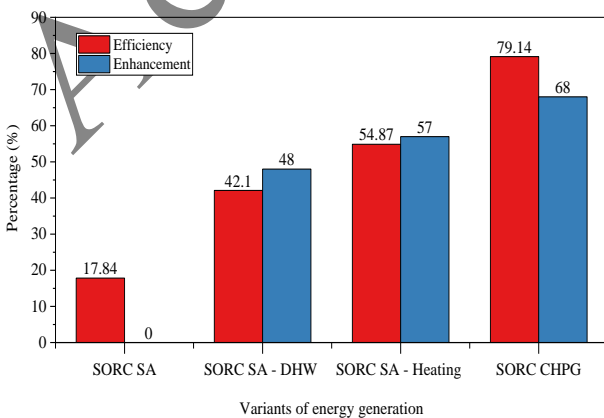


Figure 12. Comparison of the energy efficiency and improvements for different variants of energy generation.

4. ECONOMIC ASPECTS AND COST ESTIMATION

It is important to investigate the economic aspects of the proposed energy supply system. The feasibility study of SORC CHPG was carried out for electric power of 15 kW, DHW demand of 19 kW, and heating load of 29 kW. The method of Payback Period (PP) and way of Net Present Cost (NPC) were employed to examine the feasibility of applying the SORC CHPG under the current state of energy in Iraq [21,39]. The cost of the solar collector was taken as 150 – 200 \$/m² [39]. The cost of fittings, oil, and pipes was neglected in the current work given their minor contribution to the total cost of the system [33]. Table 7 presents the economic assumptions used in the feasibility study. The Investment Capital Cost (ICC) and Operation and Maintenance (O&M) costs are calculated, as presented in Table 8.

Table 7. Economic input parameters.

Parameters	Value
Price of kWh by the Iraqi government, (C_{ele})	0.024 \$/kWh [40]
Price of kWh from the SORC system, (C_{SORC})	8 cent/kWh (0.08 \$/kWh) [41]
The lifetime of the SORC system, (LT)	20 years [42]
Interest rate, (r)	5% [21]
Operating time of solar plant per day, OT_{sp}	10 - 22 h

The associated revenues from the new installation include electricity bill, savings for heating, and DHW. The number of years required to recover the TICC can be calculated using the following formula [39]:

$$PP = \frac{TICC}{S_y} \quad (21)$$

where TICC is the total cost of the SORC CHPG, including O&M costs (Table 8). S_y is the annual saving per year, \$, and is calculated as the sum of the following:

$$S_y = C_{DHW} + C_h + C_{sp} \quad (22)$$

where C_{DHW} is the cost of DHW supply from an electric water heater, which runs on electricity supplied by the Iraqi government, and given as follows:

$$C_{DHW} = P_{ewh} \times OT \times C_{ele} \quad (23)$$

where P_{ewh} is the power consumed by the electric water heater, kWh. OT is the operating time, h. C_{ele} is the cost of kWh in Iraq established by the government, \$/kWh. C_h is the cost of electricity consumption for heating devices run on the local grid in winter and can be determined using the following formula:

$$C_h = P_{hd} \times OT \times C_{ele} \quad (24)$$

where P_{hd} is the electric power of heating devices, kWh. In the case of using the proposed SORC system to supply DHW and home heating, the costs that are spent on heating and hot water supply from the local network are considered savings for the consumer/investor; therefore, they are used in the payback period equation as benefits. C_{sp} represents the cost of electric

power generated by the SORC system and is determined using the following formula [41]:

$$C_{sp} = P_g \times C_{SORC} \tag{25}$$

where C_{SORC} is the price of electricity unit generated by the SORC system, \$/kWh. P_g is the actual generation of electricity by the SORC system, kWh, and is determined via Eq. (26):

$$P_g = OT_{sp} \times 340 \times P_{ele} \tag{26}$$

where OT_{sp} is the daily actual operating time, 340 days is the real number of days that the system operates, and 25 days for rest and maintenance purposes. NPC reflects investment performance better. For regular savings per year, it can be calculated as follows:

$$NPC = \left[S_y \cdot \frac{1 - (1 + r)^{-LT}}{r} \right] - TICC \tag{27}$$

NPC is calculated depending on the lifetime of SORC CHPG. The benefits of applying the SORC CHPG for a 20-year LT can be calculated by the following formula:

Table 8. Estimated cost of major components of SORC CHPG [21,39,42].

No	Parameter	ICC, \$	O&M costs (\$ for 20 years)	TICC (\$)
1	Solar collector	175\$/m ²	(15% . ICC _{sc}) . LT	ICC _{sc} + O&M _{sc}
2	Expander/turbine	4750 . (P _{ele}) ^{0.75}	(2% . ICC _{ele}) . LT	ICC _{ele} + O&M _{ele}
3	Evaporator	150 . (A _{evap}) ^{0.8}	(4% . ICC _{evap}) . LT	ICC _{evap} + O&M _{evap}
4	Condenser	150 . (A _{cond}) ^{0.8}	(4% . ICC _{cond}) . LT	ICC _{cond} + O&M _{cond}
5	Heat exchanger for heating	150 . (A _{HEH}) ^{0.8}	(4% . ICC _{HEH}) . LT	ICC _{HEH} + O&M _{HEH}
6	Working fluid pump	3500 . (W _p) ^{0.47}	(2% . ICC _p) . LT	ICC _p + O&M _p
7	Heat storage tank	1380 . (V _{HST}) ^{0.4}	(1% . ICC _{HST}) . LT	ICC _{HST} + O&M _{HST}
Total investment capital cost				∑ TICC (\$)

Table 9. Outcomes of the economic investigation.

Indicators	Value
Cost of the proposed SORC CHPG, (TICC)	123477 \$
Net present cost, (NPC)	30112.7 \$
Payback period, (PP)	10 years
Annual benefits, (S _y)	12324.4 \$
Benefits for a 20-year lifetime from SORC CHPG, (S _{LT})	123011.7 \$

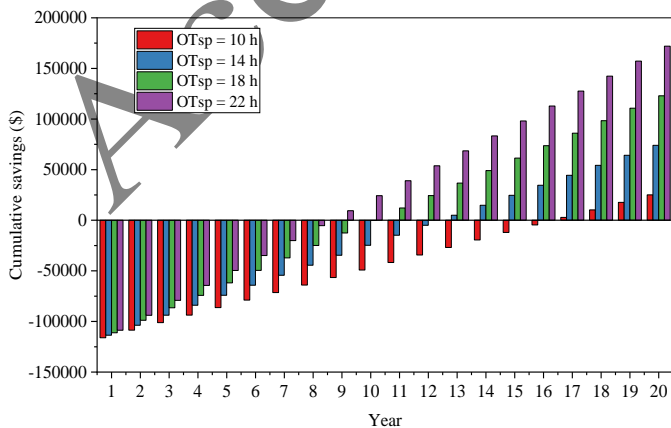


Figure 13. Variation in the payback period with operating time of SORC CHPG system.

$$S_{LT} = (S_y \cdot 20) - TICC \tag{28}$$

The payback period for the total costs of the solar plant decreases upon increasing the operating time. It is 10 years when the operating time is 18 h, as shown in Fig. 13. In addition, a positive net present value was obtained at an operating time of 18h, as presented in Fig. 14. Table 9 illustrates the findings of the economic investigation for the proposed SORC CHPG.

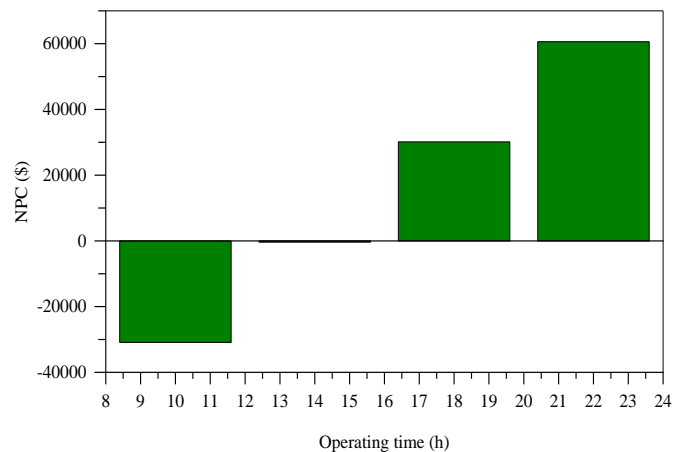


Figure 14. Variation in net present cost with the operating time of SORC CHPG system.

5. CONCLUSIONS

In the present work, a thermo-economic assessment of improved solar ORC was carried out for supplying electrical energy and thermal energy in the form of hot water for domestic needs and heating purposes for a residential home under conditions of Baghdad city. A comparative study between the

new design of SORC CHPG and conventional SORC SA was conducted concerning the thermal efficiency and energy generated. Parametric research and debating were conducted on key parameters of the proposed solar plant to determine optimal performance. The thermal energy storage unit was integrated for continuous and stable operation during climatic changes. The following conclusions can be derived from the study results:

1. The energetic efficiency of SORC CHPG was calculated as 79.14%, compared to 17.84% of SORC SA, which was 61.3% higher than the thermal efficiency of SORC SA when the temperature of the solar heat source was in the range of 100 to 150°C and solar radiation of 870 W/m² on the 15th day of July for Baghdad city.

2. The results of mathematical modeling showed that the optimal heat and electric energy produced by SORC CHPG was 54.81 kW when the HSR was approximately 870 W/m² at noon on the 15th day of July.

3. The total maximum energy (power and heat) obtained was 472.5 kW when the AGSR was at a higher value of 7.5 kWh/m²/day in June under the climatic conditions of Baghdad.

4. The study of the influence of solar radiation proved that upon increasing solar radiation, the area of the solar collector decreased and, consequently, the energy efficiency of the system improved.

5. To obtain the high temperature of hot water, it could be provided directly from the solar collector.

6. From an economic point of view, the costs related to the solar field are reduced with increase in the potential of solar energy in Baghdad.

7. The economic investigation provided in this research showed that the payback period, net present cost, and annual benefits were 10 years, 30112.7 \$, and 12324.4 \$/year, respectively, at an operating time of 18 h. They significantly depended on the operating time of the solar power plant. Following the increased reliance on the proposed system, the economic indicators rose in value.

9. Compared to the power cost of an ordinary standard grid, the price of producing electricity with ORC was higher, which was about 3-8 cents per kWh. The proposed new design of SORC CHPG could be improved based on distributed off-grid applications, and the results might significantly enhance performance and lower costs. Despite the higher cost of SORC CHPG, it can be appealing for a variety of off-grid and waste heat recovery applications. To improve ORC system and reduce the costs, the trend of thermal performance and turbine size had meaningful relations with the temperature of vapor and mass flow rates of the working fluid. SORC CHPG or multi generation are variants that enhanced the total energy efficiency and reduce the costs. Solar ORC with tri generation seems to be implemented more cost-effectively than photovoltaic power generation system.

According to the results obtained from the study, the use of the SORC system in the cogeneration of electricity and hot water for a residential building illustrated the attractiveness of applying it for energy conservation, reduction of CO₂ emission, and solving of the acute shortage of energy supply in Baghdad, Iraq. The further research opportunities are theoretical and experimental studies of the SORC system for combined

cooling, heating, and power generation under Iraqi climatic conditions with thermal energy storage units based on phase change materials.

6. ACKNOWLEDGEMENT

The author would like to thank the Department of Energy Supply for Enterprise and Thermal Engineering, Tambov State Technical University for supporting us. The researcher would like to express great appreciation of Dr. Sergei Kuzmin for providing remarkable support for this study.

NOMENCLATURE

P_{ele}	Electrical power (kW)
P_{net}	Net output power, (kW)
T	Temperature (°C)
m	Mass flow rate (kg/s)
h	Enthalpy (kJ/kg)
Q	Heat flow rate (kW)
G	Solar radiation (W/m ²)
A	Area (m ²)
C	Specific heat (kJ/kg.°C)
a_1, a_2	Coefficient of heat loss (W/(m ² .°C))
v	Specific volume (m ³ /kg)
V	Volumetric flow rate (m ³ /s)
U	Overall heat transfer coefficient (W/(m ² .°C))
LMTD	Logarithmic mean temperature difference (°C)
P	Pressure (kPa)
ICC	Investment capital cost (\$)
TICC	Total investment capital cost (\$)
S_y	Benefits/Savings per year (\$)
S_{LT}	Benefits/savings during the lifetime of a system (\$)
r	Interest rate (%)
C_{DHW}	Cost of domestic hot water supply (\$)
C_h	Cost of heating (\$)
P_{ewh}	Power of the electric water heater (kW)
OT	Operating time (h)
OT_{sp}	Daily actual operating time (h)
C_{ele}	Cost of kWh in Iraq (\$)
C_{sp}	Cost of electric power generated by the SORC (\$)
C_{SORC}	Cost of kWh by the SORC (\$)
P_{hd}	Electric power of heating devices (kW)
P_g	Actual generation of electricity by the SORC (kWh)
NPC	Net present cost (\$)
O&M	Operation and maintenance (\$)
Greek symbols	
η	Efficiency (%)
τ	Time interval (h)
Subscripts	
ele	Electric
sc	Solar collector
HTF	Heat transfer fluid
out	Outlet
in	Inlet
HST	Heat storage tank
h	Heating
o	Optical
av	Average
am	Ambient
DHW	Domestic hot water
p	Pump
g	Generator, generation
e	Expander
evap	Evaporator
cond	Condenser
wf	Working fluid
w	water
sp	Solar plant
y	Year Lifetime
LT	Lifetime
Acronyms	
ORC	Organic Rankine cycle
SORC	Solar organic Rankine cycle
SORC SA	Solar organic Rankine cycle standalone

SORC CHPG	Solar organic Rankine cycle for combined heat and power generation
DHW	Domestic hot water
HFC	Hydrofluorocarbon
sc	Solar collector
spp	Solar power plant
NPC	Net present cost
EES	Engineering Equation Solver
PP	Payback period
ICC	Investment capital cost
O&M	Operation and maintenance
LT	Lifetime

Technologies and Assessments, Vol. 49, (2022), 101732. (<https://doi.org/10.1016/j.seta.2021.101732>).

15. Herath, HMDP., Wijewardane M.A., Ranasinghe, RACP., and Jayasekera, JGAS. "Working fluid selection of Organic Rankine Cycles", *Energy Reports*, Vol. 6, (2020), 680-6. (<https://doi.org/10.1016/j.egy.2020.11.150>).

16. Tchanche, B.F., Papadakis, G., Lambrinos, G., and Frangoudakis A. "Fluid selection for a low-temperature solar organic Rankine cycle", *Applied Thermal Engineering*, Vol. 29, (2009), 2468-76. (<https://doi.org/10.1016/j.applthermaleng.2008.12.025>).

17. Rayegan, R., and Tao Y.X. "A procedure to select working fluids for Solar Organic Rankine Cycles (ORCs)", *Renewable Energy*, Vol. 36, (2011), 659-70. (<https://doi.org/10.1016/j.renene.2010.07.010>).

18. Yang, J., Li, J., Yang, Z., and Duan, Y. "Thermodynamic analysis and optimization of a solar organic Rankine cycle operating with stable output", *Energy Conversion and Management*, Vol. 187, (2019), 459-71. (<https://doi.org/10.1016/j.enconman.2019.03.021>).

19. Freeman, J., Guarracino, I., Kalogirou, S.A., and Markides, C.N.A., "small-scale solar organic Rankine cycle combined heat and power system with integrated thermal energy storage". *Applied Thermal Engineering*, Vol. 127, (2017), 1543-54. (<https://doi.org/10.1016/j.applthermaleng.2017.07.163>).

20. Bouvier, J., Ghislain, M., Patrick, S., Thiebaut, K., and Dominique, R., "Experimental study of a micro combined heat and power system with a solar parabolic trough collector coupled to a steam Rankine cycle expander" *Solar Energy*, Vol. 134, (2016), 180-192. (<https://doi.org/10.1016/j.solener.2016.04.028>).

21. Garcia-Saez, I., Méndez, J., Ortiz, C., Loncar, D., Becerra, J.A., and Chacartegui, R., "Energy and economic assessment of solar Organic Rankine Cycle for combined heat and power generation in residential applications", *Renewable Energy*, Vol. 140, (2019), 461-76. (<https://doi.org/10.1016/j.renene.2019.03.033>).

22. Habka, M., and Ajib, S. "Performance estimation of mixtures in solar Organic Rankine Cycle with two mini cogeneration options for improvement purpose", *Sustainable Energy Technologies and Assessments*, Vol. 16, (2016), 174-89. (<https://doi.org/10.1016/j.seta.2016.06.002>).

23. Yüksel, Y.E., "Thermodynamic assessment of modified Organic Rankine Cycle integrated with parabolic trough collector for hydrogen production", *International Journal of Hydrogen Energy*, Vol. 16, (2018), 5832-41. (<https://doi.org/10.1016/j.ijhydene.2017.09.164>).

24. Singh, H., Mishra, R.S., "Performance analysis of solar parabolic trough collectors driven combined supercritical CO₂ and organic Rankine cycle", *Engineering Science and Technology, an International Journal*, Vol. 21, (2018), 451-64. (<https://doi.org/10.1016/j.jestech.2018.03.015>).

25. Yunus A. Cengel., "Heat transfer, a practical approach", 2nd ed, McGraw-Hill, New York, (2004), 1-896. (<https://doi.org/10.5408/0022-1368-4-2-2.83>).

26. Rajput, R.K., "Engineering Thermodynamics", 3rd ed. Boston: LAXMI PUBLICATIONS (P) LTD 113, Golden House, Daryaganj, New Delhi-110002; (2007). (<https://www.technicalbookspdf.com/engineering-thermodynamics-third-edition/>).

27. F-Chart Software, Engineering equation solver (EES). (<https://fchartsoftware.com/ees/>). (Accessed: 20 July 2022).

28. Akram Al-Khazzar A.K., "A Comparative Study of the Available Measured Global Solar Radiation in Iraq", *Journal of Renewable Energy and Environment*, Vol. 4, (2018), 47-55. (<https://doi.org/10.30501/jree.2017.86011>).

29. Al-Obaidi, M.Q., Hamid, T.G., Derbel, N., "Design of Solar Powered Water Pumping System for Domestic Use in Erbil", *Proceedings of the 17th International Multi-Conference on Systems, Signals and Devices*, (2020), 272-8. (<https://doi.org/10.1109/SSD49366.2020.9364196>).

30. Hassan, Q., Abbas, M.K., Abdulateef, A.M., Abulateef, J., and Mohamad, A. "Assessment the potential solar energy with the models for optimum tilt angles of maximum solar irradiance for Iraq", *Case Studies in Chemical and Environmental Engineering*, Vol. 4, (2021), 100140. (<https://doi.org/10.1016/j.cscee.2021.100140>).

REFERENCES

- Razmi, A., Soltani, M., and Torabi, M. "Investigation of an efficient and environmentally-friendly CCHP system based on CAES, ORC and compression-absorption refrigeration cycle: Energy and exergy analysis", *Energy Conversion and Management*, Vol. 195, (2019), 1199-211. (<https://doi.org/10.1016/j.enconman.2019.05.065>).
- Saeed, IM., Ramli, AT., and Saleh, MA. "Assessment of sustainability in energy of Iraq, and achievable opportunities in the long run", *Renewable and Sustainable Energy Reviews*, Vol. 58, (2016), 1207-15. (<https://doi.org/10.1016/j.rser.2015.12.302>).
- Martins, F., Felgueiras, C., Smitkova, M., and Caetano, N. "Analysis of fossil fuel energy consumption and environmental impacts in european countries", *Energies*, Vol. 12, (2019) 1-11. (<https://doi.org/10.3390/en12060964>).
- Solarin, SA. "An environmental impact assessment of fossil fuel subsidies in emerging and developing economies", *Environmental Impact Assessment Review*, Vol. 85, (2020), 106443. (<https://doi.org/10.1016/j.eiar.2020.106443>).
- Solarin, S.A., "Towards sustainable development in developing countries: Aggregate and disaggregate analysis of energy intensity and the role of fossil fuel subsidies", *Sustainable Production and Consumption*, Vol. 24, (2020), 254-65. (<https://doi.org/10.1016/j.spc.2020.07.011>).
- Bigerna, S., Bollino, C.A., and Polinori, P. "Convergence in renewable energy sources diffusion worldwide", *Journal of Environmental Management*, Vol. 292, (2021), 112784. (<https://doi.org/10.1016/j.jenvman.2021.112784>).
- Al-Hamdani, N.I., "Solar Energy Applications in Iraq", *International Journal of Scientific Engineering and Science*, Vol. 1, (2017), 30-9. (<http://ijses.com/wp-content/uploads/2017/10/174-IJSES-V1N9.pdf>).
- Chaichan, M.T., and Kazem H.A. "Generating electricity using photovoltaic solar plants in Iraq", Springer Cham, Switzerland, (2018), 1-207. (<https://doi.org/10.1007/978-3-319-75031-6>).
- Al-Kayiem, H.H., and Mohammad, S.T. "Potential of renewable energy resources with an emphasis on solar power in Iraq: An outlook". *Resources*, Vol. 8, (2019), 1-20. (<https://doi.org/10.3390/resources8010042>).
- Kazem, H.A., and Chaichan, M.T. "Status and future prospects of renewable energy in Iraq", *Renewable and Sustainable Energy Reviews*, Vol. 16, (2012), 6007-12. (<https://doi.org/10.1016/j.rser.2012.03.058>).
- Malwe, P.D., Shaikh, J., Gawali, B.S., Panchal, H., Dalkilic A.S., Rahman, S., et al. "Dynamic simulation and exergy analysis of an Organic Rankine Cycle integrated with vapor compression refrigeration system", *Sustainable Energy Technologies and Assessments*, Vol. 53, (2022), 102684. (<https://doi.org/10.1016/j.seta.2022.102684>).
- Oyekale, J., and Emagbetere, E.A., "Review of conventional and exergetic life cycle assessments of organic Rankine cycle plants exploiting various low-temperature energy resources", *Heliyon*, Vol. 8, (2022), 102684. (<https://doi.org/10.1016/j.heliyon.2022.e09833>).
- Malwe, P., Gawali, B., Shaikh, J., Deshpande, M., Dhalait, R., Kulkarni S., et al. "Exergy assessment of an Organic Rankine Cycle for waste heat recovery from a refrigeration system: a review", *Chemical Engineering Communications*, Vol. 195, (2021), 1-29. (<https://doi.org/10.1080/00986445.2021.1980396>).
- Gupta, P.R., Tiwari, A.K., Said, Z. "Solar organic Rankine cycle and its poly-generation applications – A review", *Sustainable Energy*

31. Mohammed Ali, S., "Energy efficiency assessment of solar organic rankine cycle for production of heat and electrical energy in the climatic conditions of Iraq", M.Sc thesis, Tambov State Technical University, (2020).
32. Manufacturer of heat transfer fluids Polyester, Heat carrier TLV-330, (<https://termolan.ru/tlv-330m/>). (Accessed: 24 July 2022).
33. Aghaziarati, Z., and Aghdam, A.H., "Thermoeconomic analysis of a novel combined cooling, heating and power system based on solar organic Rankine cycle and cascade refrigeration cycle", *Renewable Energy*, Vol. 164, (2021), 1267-83. (<https://doi.org/10.1016/j.renene.2020.10.106>).
34. Bellos, E., and Tzivanidis, C., "Parametric analysis and optimization of a solar driven trigeneration system based on ORC and absorption heat pump", *Journal of Cleaner Production*, Vol. 161, (2017), 493-509. (<https://doi.org/10.1016/j.jclepro.2017.05.159>).
35. Baral, S., and Kim, K.C., "Thermodynamic modeling of the solar organic rankine cycle with selected organic working fluids for cogeneration", *Distributed Generation and Alternative Energy Journal*, Vol. 29, (2014), 7-34. (<https://doi.org/10.1080/21563306.2014.10879015>).
36. Hossin, K., and Mahkamov, K., "Performance Evaluation for a 10 kW Solar Organic Rankine Cycle Power System to Operate in the UK Climate Conditions", *The Third European Conference on Sustainability, Energy & the Environment ECSEE2015*, (2015), 16. (<https://doi.org/10.13140/RG.2.1.4135.4721>).
37. Wang, Z., Zhou, N., and Jing, G., "Performance analysis of ORC power generation system with low-temperature waste heat of aluminum reduction cell", *Physics Procedia*, Vol. 24, (2012), 546-53. (<https://doi.org/10.1016/j.phpro.2012.02.080>).
38. Rajput, E.R.K., "Heat and Mass Transfer", Fifth Edit, S. Chand & Company Ltd., New Delhi, (2012), 903. (http://referenceglobe.com/kpsslp/support/upload_videos/Heat%20and%20Mass%20Transfer%20%20rajput_1586515462.pdf).
39. Gomaa, M.R., Mustafa, R.J., Al-Dhaifallah, M., and Rezk H.A., "low-grade heat Organic Rankine Cycle driven by hybrid solar collectors and a waste heat recovery system", *Energy Reports*, Vol. 6, (2020), 3425-45. (<https://doi.org/10.1016/j.egyr.2020.12.011>).
40. Global petrol prices, Iraq electricity prices, (https://www.globalpetrolprices.com/Iraq/electricity_prices/). (Accessed: 26 July 2022).
41. Muslim, H.N., Alkhazraji, A., and Salih, M.A., "Feasibility study of using 2kWp residential PV system comparing with 2.5kVA gasoline generator (Case study: Baghdad city)", *International Journal of Energy and Environment*, Vol. 9, (2018), 57-62. (https://www.ijee.ieefoundation.org/vol9/issue1/IJEE_05_v9n1.pdf).
42. Suresh Baral, Dokyun Kim, Eunkoo Yun and KCK, "Energy, Exergy and Performance Analysis of Small-Scale Organic Rankine Cycle Systems for Electrical Power Generation Applicable in Rural Areas of Developing Countries", *Energies*, Vol. 8, (2015), 684-713. (<https://doi.org/10.3390/en8020684>).